



WEBER-STEPHEN PRODUCTS CO.
PALATINE, ILLINOIS 60067

Addendum to the Side Burner Installation

Prior to attaching side burner hose: Remove the protective brass cap from the side burner fitting.

Caution: Make sure gas supply is turned off; e.g.: L.P. cylinder valve off, natural gas shut off valve turned off.

Use a 11/16 open end or an adjustable wrench to remove the protective brass cap from the side burner fitting on the manifold. Figure 1 for a Genesis 3. Figure 2 for a Genesis 5.

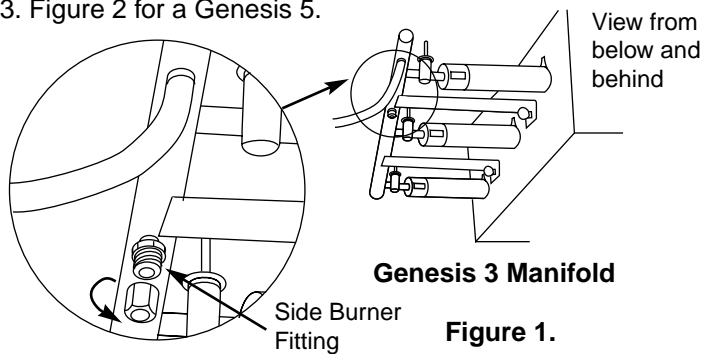


Figure 1.

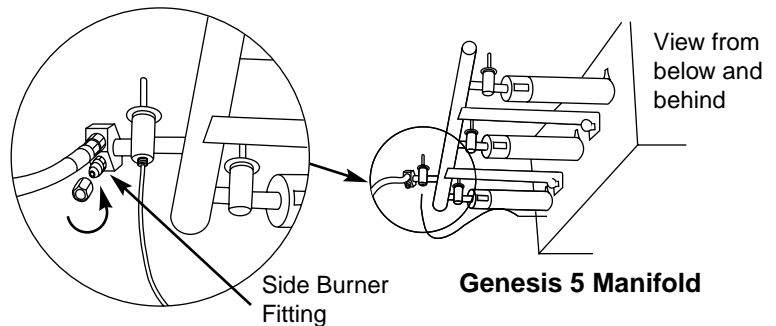


Figure 2.

Caution; when removing the cap you may require a second wrench to "hold" the side burner fitting to keep it from loosening.

If the side burner fitting should loosen, tighten, before attaching side burner hose.

Follow the step in your Owner's Manual for side burner installation.

4736912 1/89



WEBER-STEPHEN PRODUCTS CO.
PALATINE, ILLINOIS 60067

Addendum to the Side Burner Installation

Prior to attaching side burner hose: Remove the protective brass cap from the side burner fitting.

Caution: Make sure gas supply is turned off; e.g.: L.P. cylinder valve off, natural gas shut off valve turned off.

Use a 11/16 open end or an adjustable wrench to remove the protective brass cap from the side burner fitting on the manifold. Figure 1 for a Genesis 3. Figure 2 for a Genesis 5.

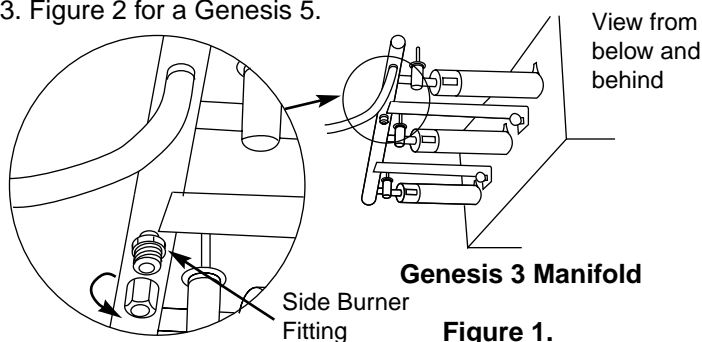


Figure 1.

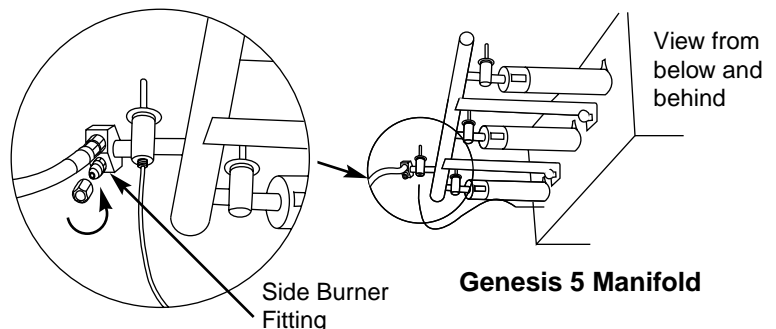


Figure 2.

Caution; when removing the cap you may require a second wrench to "hold" the side burner fitting to keep it from loosening.

If the side burner fitting should loosen, tighten, before attaching side burner hose.

Follow the step in your Owner's Manual for side burner installation.

4736912 1/89